



PRISMA MINI BAR 20

PRELIMINARY

SPECIFICATIONS / TECHNICAL DATA REV A

KEY FEATURES

IP65 Rated Exterior High-Power UV Wash Luminaire
Scoop LED Reflector Design
20 Degree Wide Beam Angle
365nm Peak True UV Wavelength
Optional Black Glass Diffusion Filter



SPECIFICATIONS

Dynamic Effects

- . 20° Beam Angle
- . Variable Dimming Curve Modes
- . High Speed Electronic Strobe
- . Beam Uniformity
- . LCD Display
- . (10) 3W High Power UV Diode Led's
- . 20,000 Hour Average Led Life

Control

- . RDM (Remote DMX) Protocol Support
- . Art-Net Protocol Support
- . Master/Slave Modes
- . Onboard 4 Button Touch Control Panel

Connections

- . 9 ft (2.74m) 2-Conductor 14 Gauge IP Rated Power/Data Pigtail Cable Attached

Construction / Physical / Performance

- . Dimensions (LxWxH): 23.42 x 3.94 x 4.13in. / 595 x 100 x 105mm
- . Weight: 4.85lbs. / 2.2kg

Electrical

- . Input Voltage: DC 0-36.7V
- . Power Consumption: 24.3W

MAGMATIC



PRISMA MINI BAR 20

PRELIMINARY

SPECIFICATIONS / TECHNICAL DATA REV A

Certifications / Qualifications / Thermal


- . IP Rating: IP65 Rating
- . Approvals: ROHS, CE Approved
- . Cooling: Air Cooled
- . Maximum Temperature (Ambient): 113° F (45° C)
- . Minimum Temperature (Ambient): 14° F (-10° C)

What's Included

- . Phoenix Connector (x1)
- . Positive Wire Tip Sheath (x1)
- . Negative Wire Tip Sheath (x1)

Optional Accessories

- . Prisma Mini Bar 20 Black Glass (PSG820)

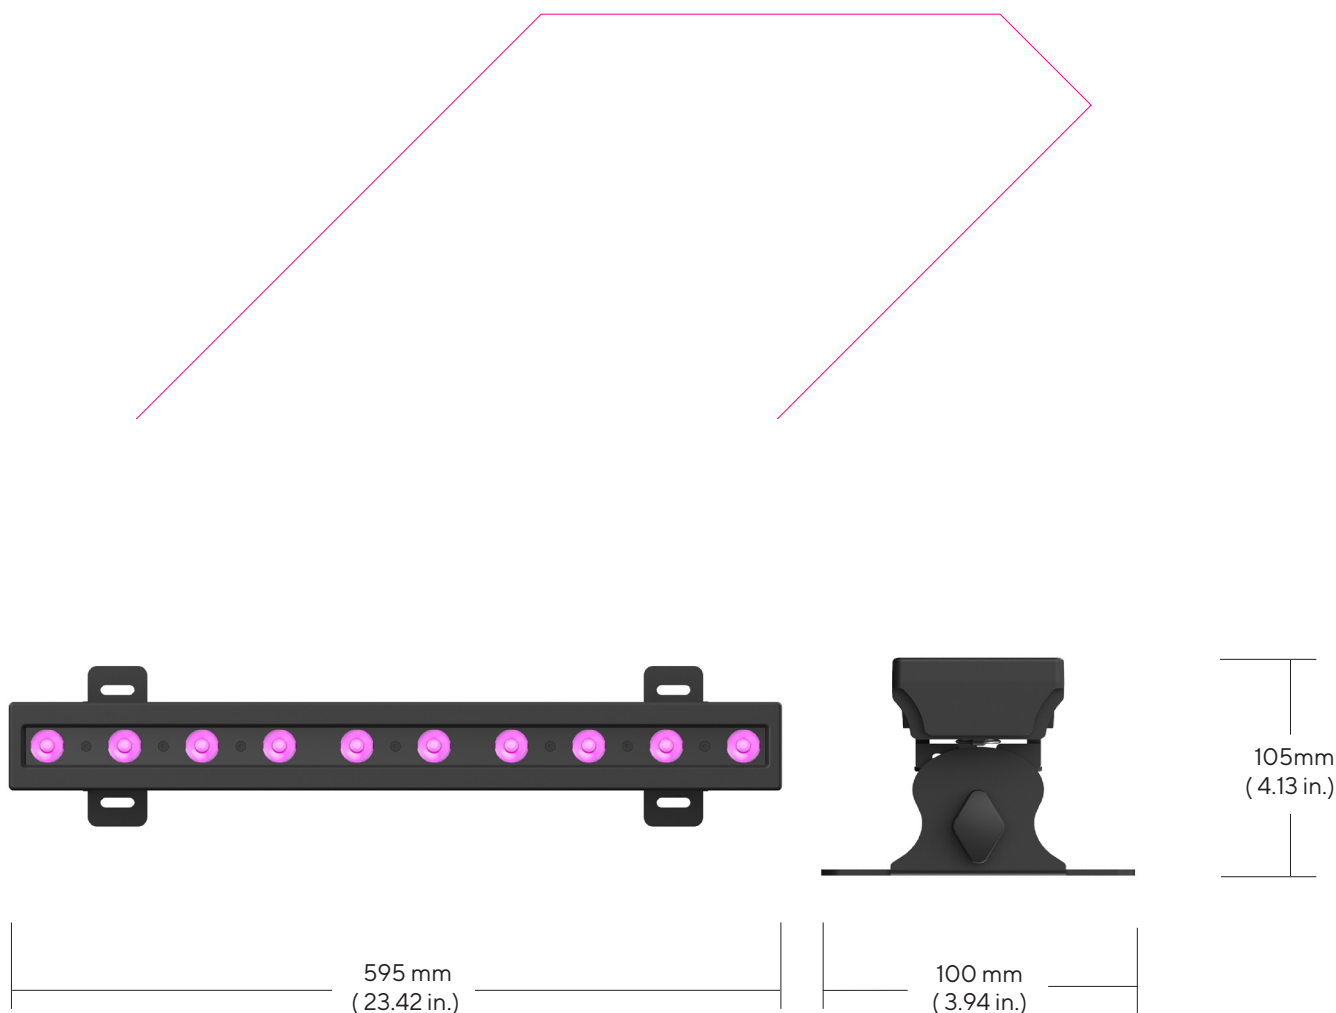

MAGMATIC